


### Product Description

The ATC-1000 is a cost effective and highly integrated Serial-to-Ethernet Converter. Embedding a 8051CPU, 64KB OTP ROM, 32K bytes SRAM, 10/100Mbps Ethernet and serial port support handshake RTS, CTS. ATC-1000 Can control 1 x RS232/422/485 devices located virtually anywhere (via Ethernet or Internet).

Automaticly finds devices in the network Configuration over Driver Panels, serial Port, Telnet, WEB Browser, SNMP Automatic mode switching between Driver and RAW mode Support TCP/IP, UDP, DHCP, PPPoE, Dynamic DNS.

ATC-1000 is an industrial-strength network-based Serial device server for connecting one RS232/422/485 device like CNC, PLC, weighting scale, scanner and other device Directly to the 10/100Mbps Ethernet network running TCP/IP. In addition to allowing serial devices to get networked, any host (PC Server or Workstation) can also access remote serial device via adding ATC-1000 devices to the existing serial port.

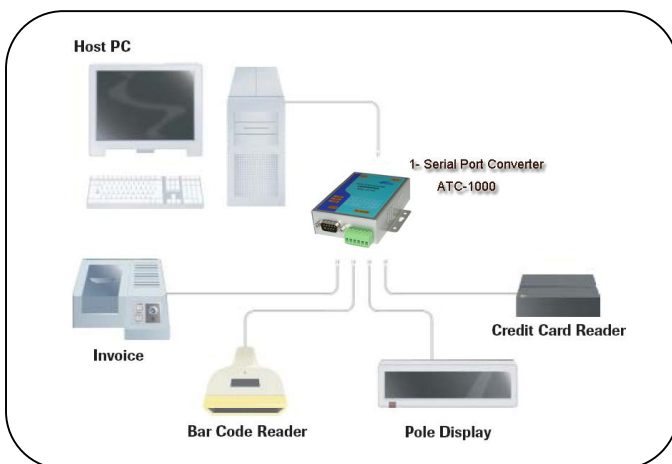

### Product Features

- ◆ 3-in-1 RS-232/422/485 interface Max.230Kbps Serial interface and 10/100 Mbps Ethernet
- ◆ Supports 4- and 2-wire RS-485 with AUTO-SEND™ and built-in terminator
- ◆ Supports industrial 24 VDC power input and optional Power over Serial
- ◆ Terminal block accessories for easy RS-422/485 serial wiring
- ◆ Supports IP configuration by MAC address
- ◆ Supports configuration store and copy for easy deployment
- ◆ Supports Driver, TCP Server/Client, UDP Server/Client, Pair Connection operation modes
- ◆ Easy and powerful configuration program
- ◆ Approval CE, RoHS



### Order Information:

Model No.	Description	Serial Type	Serial No.
ATC-1000	TCP/IP to Single Port Converter	232/422/485	1
ATC-1000M	Embedded Module	3.3V TTL	1
ATC-1000/IO	TCP/IP to I/O converter	232/422/485,I/O	1
ATC-1000/AD	TCP/IP to analog converter	232/422/485,ADC	1

## Specifications

Serial Interface	
<b>Data Rates</b>	300 bps to 230,400 bps
<b>Characters</b>	7 or 8 data bits
<b>Parity</b>	Odd, even, none
<b>Stop Bits</b>	1 or 2
<b>Control Signals</b>	CTS, RTS
<b>Flow Control</b>	XON / XOFF, RTS / CTS
<b>Connector</b>	DB9-DTE (Male). Null Modem adapter included DCE (Female)
Network Interface	
<b>Interface</b>	Ethernet 10Base-T or 100Base-TX (Auto-Sensing)
<b>Connector</b>	RJ45
<b>Protocol</b>	TCP/IP, UDP/IP, ARP, ICMP, TFTP, Telnet, DHCP, BOOTP, HTTP, and AutoIP
Indicators (LED)	
I	10/100Base-TX Link & activity indicator
I	Data Sending / Receiving between Serial and the Ethernet
I	Power indicator
Management	
Internal web server, SNMP, Telnet, serial, and Microsoft Windows®-based utility for configuration	
Security	
Password protection	
Internal Web Server	
<b>Storage Capacity</b>	384KB for web pages
Architecture	
<b>CPU</b>	Based on the 8051CPU, Frequency 25MHz
<b>Memory</b>	64KB OTP ROM, 32K bytes SRAM
<b>Firmware</b>	Upgradeable by manufacturer
Power	
<b>Input Voltage</b>	8-24 VDC @500mA
Included Software	
MS Window®-based Device Installer software device installer and MS Windows-based Comm Port Redirector	

Contact us now for more information:

**SHENZHEN ATC TECHNOLOGY CO., LTD**

Room 809, Taikang Building, Tairan Industrial & Trading,  
Futian District, Shenzhen China

E\_mail: [sales@szatc.com](mailto:sales@szatc.com)

Homepage: <http://www.szatc.com>

**Agent:**